

**Safe working load 45 tonne**




## Bridge Specifications

The CB12 is a construction vehicle bridge designed to take a safe working load of up to 45 tonne. It has unique abilities which include, it is quick to install, has a exceptional live load / dead weight ratio reducing crane cost. It can be used in many and varied applications. The bridge will arrive on one articulated trailer in two 'planks', each 'plank' is then lifted into the final position.

## Data

Overall width (not separated)	3.7m
Internal width (not separated)	3.2m
Internal width (separated with a non weight bearing strip)	4.0m
Overall weight of both sections	10 tonne
Width of each unit	1.85m
Minimum bank support	0.760m
Weight of each unit	5 tonne

## Dimensions

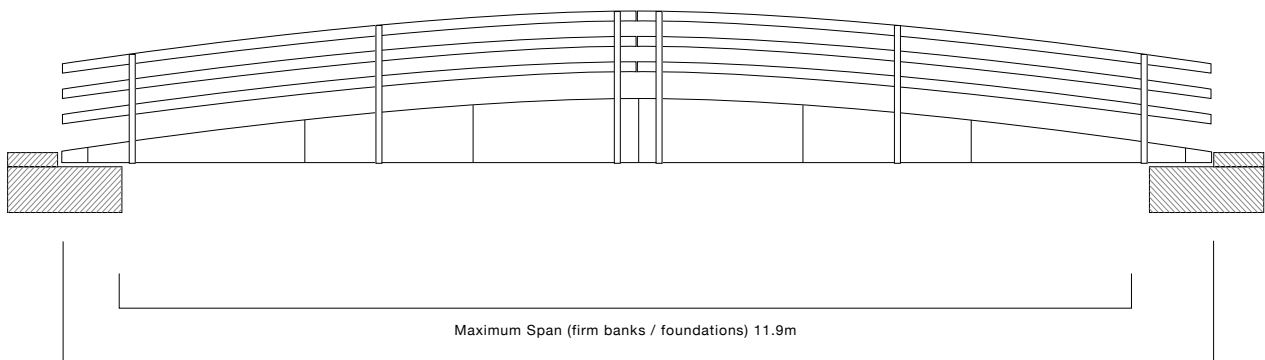

*Foundations drawn are 1m long 3.5m wide (4.4m if separated) .5m deep with a 150mm step to ground level and 13.54m between steps.*