

**Safe working load 45 tonne**




## Bridge Specifications

The CB24 is a construction vehicle bridge designed to take a safe working load of up to 45 tonne. It has unique ability which include, it is quick to install, has a exceptional live load / dead weight ratio reducing crane cost. It can be used in many and varied applications. The bridge will arrive on one articulated trailer in sections put together to make two 'planks'. Once assembled each 'plank' is lifted into the final position.

## Data

Overall width (not separated)	3.7m
Internal width (not separated)	3.2m
Internal width (separated with a non weight bearing strip)	4.0m
Overall weight of both sections	16 tonne
Width of each unit	1.85m
Minimum bank support	1m
Weight of each unit	8 tonne

## Dimensions

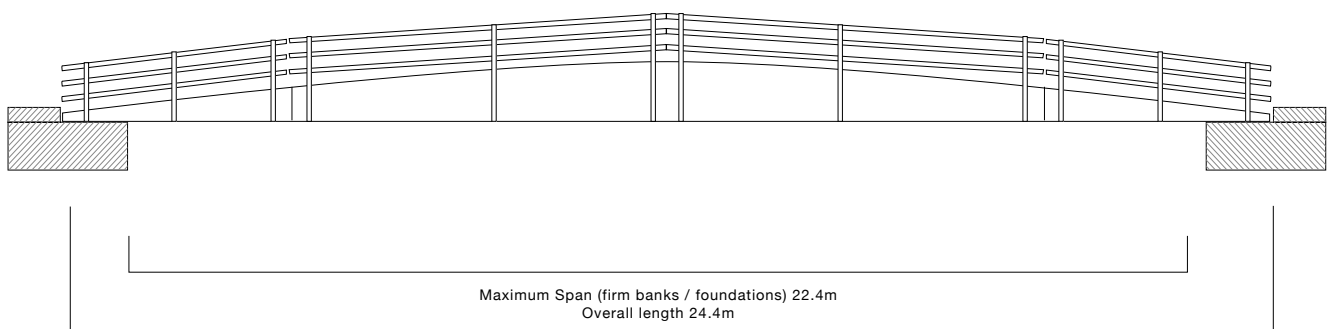

*Foundations drawn are 1m long 3.5m wide (4.4m if separated) .5m deep with a 150mm step to ground level and 24.54m between steps.*